



# TECHNICAL BULLETIN HIGH PRESSURE SODIUM

## EYE HORTILUX™ SUPER HPS LU1000B/HTL/EN

ANSI Code: S52


Product Code: 66785

**Features:**


- EPA TCLP compliant for non-hazardous waste
- Dependable long life
- Universal burning position

### PERFORMANCE DATA

Initial lumens at rated watts after 100 hours operation	145000	lm
Mean lumens at 10 hours/start	127000	lm
Rated average life	24000	h
Warm up time (90% lumens)	5	min
Correlated color temperature	2100	K
CIE chromaticity	0.532, 0.403	X, Y
Color rendering index	26	
Operating Position	Any	
Hot Re-strike time	15	min




Spectral Distribution

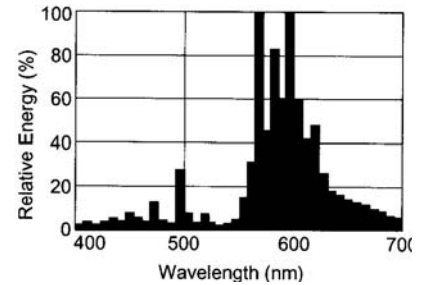

### ELECTRICAL CHARACTERISTICS

Nominal lamp wattage	1000	W
Nominal lamp voltage	250	V
Nominal lamp current	4.7	A <sub>rms</sub>
Current crest factor (max.)	1.8	
Max. starting current	8.0	A <sub>rms</sub>
Min. starting current	4.7	A <sub>rms</sub>
Ballast requirements	Use with ballast rated for S52 lamps	
<b>Open circuit voltage</b>		
-40°C (-40°F)	456	V <sub>rms</sub>
Lampholder rating	5	kV
<b>IGNITOR REQUIREMENTS</b>		
Min. Pulse Height	3000	v
Max. Pulse Height	5000	v
Min. Pulse Width	4.0@2700	µsec@V


LAMP MORTALITY

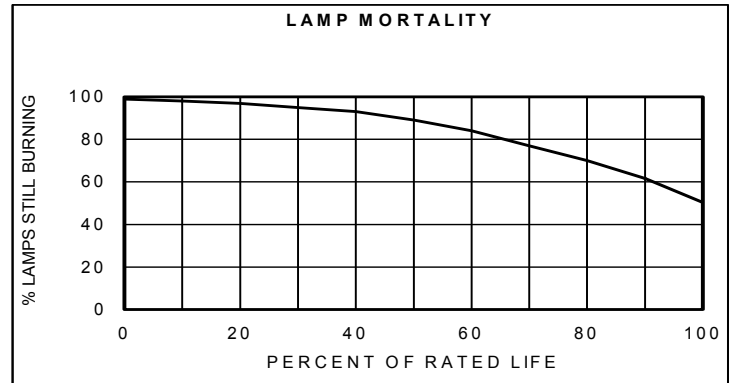

### PHYSICAL DESCRIPTION

Maximum overall length	383 (15.079)	mm (in)
Light center length	222 (8.740)	mm (in)
Bulb diameter	79 (3.110)	mm (in)
Base to bulb eccentricity (max.)	3	Degrees
Maximum base temperature	210 (410)	°C (°F)
Maximum bulb temperature	400 (752)	°C (°F)
Bulb designation	E25	
Bulb material	Borosilicate (Hard Glass)	
Arc tube material	PCA	
Arc length	169.7 (6.681)	mm (in)
Bulb finish	Clear	
Base designation	Mogul (E39)	
EPA TCLP Compliant	Yes	

LUMEN MAINTENANCE

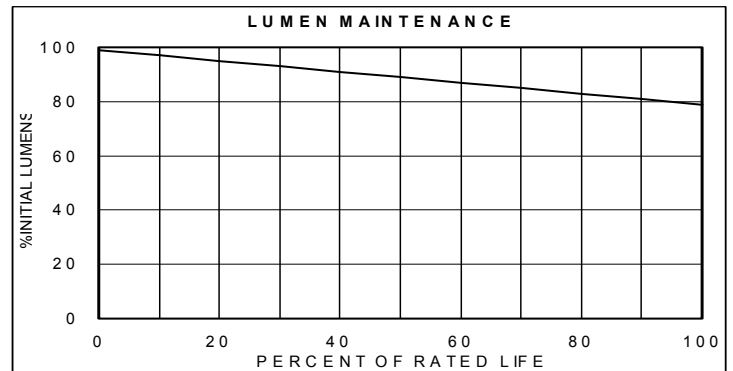

**EYE LIGHTING INTERNATIONAL  
OF NORTH AMERICA, INC.**  
A SUBSIDIARY OF IWASAKI ELECTRIC CO., LTD.

Address: 9150 Hendricks Rd., Mentor, OH 44060  
Phone: 888-665-2677 Fax: 800-811-7395 E-mail: sales@eyelighting.com  
Phone: (440) 350-7000 Fax: (440) 350-7001 Web: [www.eyehortilux.com](http://www.eyehortilux.com)

ISO 9001:2000 Certified



**⚠WARNING**

**RISK OF ELECTRIC SHOCK:**

- Turn power off before inspection, installation or removal.
- Protect lamp from direct contact with liquids to avoid breakage from thermal shock.

**RISK OF FIRE:**

- Keep combustible materials away from lamp during operation.

**UNEXPECTED LAMP RUPTURE MAY CAUSE INJURY, FIRE OR PROPERTY DAMAGE**

- Do not exceed rated ballast voltage.
- Do not use lamp if outer glass is scratched or broken.
- Do not use beyond rated life.
- Do not turn on lamp until fully installed.
- Use only with fixture and ballast rated for this product.
- Electrically insulate any metal to glass support in fixture.

**⚠CAUTION**

**RISK OF BURN:**

- Allow lamp to cool before handling.
- Contains sodium – Avoid skin contact with broken pieces.

**LAMP MAY SHATTER AND CAUSE INJURY IF BROKEN**

- Do not use excessive force when installing lamp.
- Dispose of lamp in an enclosed container.
- Wear safety glasses and gloves when installing lamp.

**Hg-LAMP CONTAINS MERCURY**  
Manage in Accord with Disposal Laws  
See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-888-665-2677

